


4K Video Soundbar

AMC-G309UV2

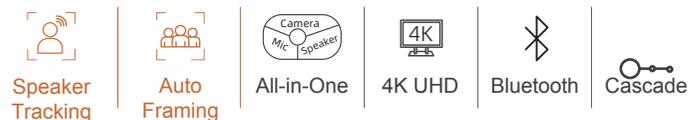

Features

- Integrated design of video cam, microphones and speakers, easy setup of remote video conference;
- Smart and precise positioning of speaker and auto framing, giving best view of speaker and all attendees;
- 4K UHD video for superb experience;
- HFOV up to 110°, full cover of meeting room;
- Built-in high-sense mic array, pickup range up to 5 meters, supporting AGC, AEC, ANC;
- Supporting 2 external cascade microphones to extend pickup range up to 12 meters;
- Speaker with Passive diaphragm design with enhanced bass experience;
- USB3.0 interface, supporting MJPEG/H.264/H.265 data;
- Built-in Bluetooth for easy connection of external devices;
- Compatible with main cloud platforms such as Zoom and Microsoft Teams etc.;
- Equipped with bracket for TV installation.

Technical Data

Camera

Image Sensor
1/2.8" 4K CMOS, 8.46MP

Iris
F2.2

Focal Length
f=2.1mm

Digital Zoom
4x

FOV
Horizontal: 110°, Vertical: 74°

EPTZ
Support

Min Focus Distance
50cm

Video Output Format
4KP30

Exposure
Auto, Manual, Shutter Priority

White Balance
Auto, Manual

DNR
2D/3D

Image Flip
Flip/Mirror

Audio

Built-in Mic
4 MIC array

Pick-up Distance
5 meters

Audio Process
AEC/ANC/AGC

USB

1xUSB3.0, Type B. Support UVC 1.0
MJPEG/H.264/H.265
MJPEG: 4KP30/P25, 1080P30/P25, 720P30/P25, 360P30/P25
H.264: 4KP20, 1080P30/P25, 720P30/P25, 360P30/P25
H.265: 4KP20, 1080P30/P25, 720P30/P25, 360P30/P25

EPTZ

EPTZ
Support

Other

Network Interface
RJ45, 10M/100M

Remote Control
Support

Mic Extension
Support

General

Power
DC12V; <8W

Dimension (L×W×H)
603mm×74mm×93mm

Operating Temperature
0°C ~ +40°C

Storage Temperature
-20°C ~ +60°C

Weight
≤2kg

Microphone EM1

SNR
69dB

Pick-up Distance
3 Meters, 360°

Cascade Number
Support up to two

Dimensions (L×W×H)
90mm×90mm×36mm