


1080P60 PTZ Camera


AMC-(N)G330P/(N)G320P



NDI HX3
SRT

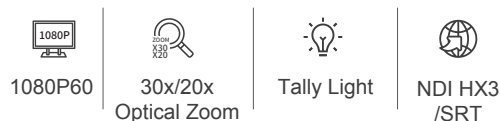

AMC-G330P/G320P
AMC-NG330P/NG320P(NDI HX3)



- 1 USB3.0
- 2 HDMI
- 3 3G-SDI
- 4 LINE IN
- 5 LAN
- 6 RS-232 IN
- 7 RS-485/422
- 8 DC 12V

Features

- Max 30x optical zoom, up to 1080P60 resolution, support 59.94/29.97 frame rate;
- Compact and compact appearance design with prominent Tally Lamp ;
- Network protocols support SRT/ONVIF/RTMPS/VISCA OVER IP;
- Support NDI HX3, WEB UI;
- With HDMI, Network, 3G-SDI and USB3.0 video output interface, support POE;
- Control Interface support RS-232 IN, RS-485/422;
- Support large collaboration spaces such as classrooms, halls, live streaming events, etc;
- Compatible with mainstream video conference on the market;
- Tally Light supported.

Technical Data

Camera

AMC-(N)G330P	AMC-(N)G320P
Image Sensor 1/2.8" CMOS, 2.14 MP	Image Sensor 1/2.8" CMOS, 2.14 MP
Optical Zoom 30x	Optical Zoom 20x
Lens f=5.2~156mm; F1.6~F5	Lens f=4.7~94.0mm; F1.6~3.5
HFOV 56.5°~ 2°	HFOV 59.5°~ 2.9°

PTZ

Pan -170° ~ +170°; 0.1° ~ 120°/s
Tilt -30° ~ +90°; 0.1° ~ 90°/s
Preset Number 256 (Network)
Image Flip Support

General

Power DC12V; <15W
Control Protocol VISCA
Operating Temperature 0°C ~ +40°C
Storage Temperature -20°C ~ +60°C
Dimensions(L×W×H) 176mm×137mm×171mm
Weight <1.2kg

Other Camera Data

Digital zoom 16x	Shutter Speed 1/50 ~ 1/10,000s
Focus System Auto, Manual, PTZ Trigger, One Push Trigger	AGC Auto, Manual
Exposure Control Auto, Manual, Shutter Priority, Iris Priority, Bright Priority	White Balance Auto, One Push, Manual, Static Color Temperature
Min. Illumination 50Lux	SNR ≥50dB
	Menu Yes

Interface

HDMI Video Format: 1080P60/P50/P30/P25, 720P60/P50/P30/P25 Broadcast resolution: 1080P59.94/P29.97, 720P59.94/P29.97	USB 1×USB 3.0 Type-B, UAC Audio Format PCM, USB3.0 Compatible with USB2.0 1.Support UVC1.1. 2.UVC Video Format Support: H.264/H.265/MJPEG, Max 1080P60 YUY2/NV12, Max 1080P30 USB3.0: Max 1080P30 USB2.0: Max 1080P30	3G-SDI 1×3G-SDI, support audio output 1080P60/P59.94/P50/P30/P29.97/P25; 720P60/720P59.94/P50
Network 1×10M/100M RJ45 (POE) Image Compression: H.265, H.264 Audio Compression: AAC, G.711 Protocols: ONVIF/RTSP/RTMP/SRT/TCP/UDP/RTMPS/ VISCA OVER IP Video Output Format: 1080P60/P50/P30/P25; 720P60/P50/P30/P25; 360P60/P50/P30/P25 Support multiple stream Support NDI HX3		Audio Input 1×LINE IN 3.5mm
		Control Interface 1 × RS-232 IN, 1 × RS485/422
		Power DC12V
		Remote Interface IR Remote control
		Display Interface Supports red and green dual color Tally lamps