



4KP60 Dual Cam PTZ Camera

PVC-G530P/G520P/G512P

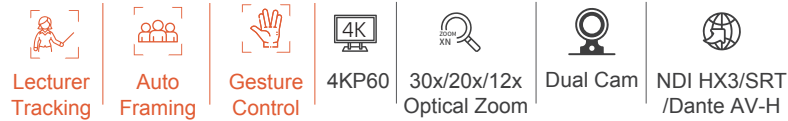

NDI HX3
Dante AV-H[™]
SRT



- ① 3G-SDI
- ② DIP Switch
- ③ LAN
- ④ HDMI
- ⑤ USB2.0
- ⑥ Ref.LINE IN
- ⑦ LINE IN
- ⑧ RS-232 IN
- ⑨ RS-232 OUT
- ⑩ DC 12V

Features

- Dual cam design with simultaneous 4K video output;
- Tracking cam: 30x/20x/12x optical zoom, max 4K60 UHD video output, support 59.94/29.97;
- Full-View cam: HFOV 94°, no distortion;
- Built-in advanced AI algorithm based on deep learning;
- Board writing detection based on skeletal key point recognition;
- Rich AI tracking modes such as auto framing, zone tracking, lock-n-track, group tracking, gesture control etc.;
- Simultaneous output over HDMI, USB, Ethernet;
- Support POE;
- Built-in WebUI, for easy setting and operation;
- Support NDI HX3, SRT, Dante AV-H.

Technical Data

Tracking Camera

PVC-G530P	PVC-G520P	PVC-G512P
Focal f=5.2mm ~ 156mm	Focal f=5.2mm ~ 106mm	Focal f=3.4mm ~ 40.3mm
Iris F1.6 ~ F5	Iris F1.6 ~ F3.5	Iris F1.8 ~ F3.6
Optical Zoom 30x	Optical Zoom 20x	Optical Zoom 12x
HFOV 56.5° ~ 2°	HFOV 56.5° ~ 2.8°	HFOV 81° ~ 7.6°

Tracking Camera Others

Image Sensor
1/2.8"CMOS, 8.46MP

Focus
Auto, Manual, PTZ Trigger, One Push Trigger

Shutter Speed
1/60 ~ 1/10,000s

AGC
Auto, Manual

White Balance
Auto, One Push, Manual, Static Color Temperature

Exposure
Auto, Manual, Shutter, Priority, Iris Priority, Brightness Priority

Full View Camera

Image Sensor
1/2.8"CMOS, 8.46MP

Focus
f=2.8mm

HFOV
94°

White Balance
Auto

Exposure
Auto

General

Control Protocol
VISCA

Power
DC12V, < 18W

Operating Temperature
0°C ~ +40°C

Storage Temperature
-20°C ~ +60°C

Dimensions (L×W×H)
245mm×145mm×165mm

Weight
≤2kg

PTZ

Pan
-130° ~ +130°, 0.2° ~ 80°/s

Tilt
-30° ~ +90°, 0.2° ~ 60°/s

Preset Number
256

Interface

HDMI
1 × HDMI with audio;
Output switchable between full-view cam and tracking cam: max 4KP30;
Output only from tracking cam: max 4KP60;
Support broadcast resolution: max 4KP59.94/P29.97.

Audio Interface
1×LINE IN, 3.5mm

Control Interface
1×RS-232 IN, 1×RS-232 OUT

DIP Switch
Rotary DIP switch to define video format

3G-SDI
1 × 3G-SDI with audio;
Output switchable between full-view cam and tracking cam: max 1080P60;
Output only from tracking cam: max 1080P60;
Support broadcast resolution: max 1080P59.94/P29.97;

USB
USB2.0 Type-B with UAC, UVC1.1;
Output switchable between full-view cam and tracking cam: max 4KP30;
UVC supports H.264/MJPEG.

Network
10M/100M RJ45 self-adaptive with POE;
H.264/H.265, support dual stream;
Output switchable between full-view cam and tracking cam: max 4KP30;
Output only from tracking cam: max 4KP60;
Support/ONVIF/RTSP/RTMP /SRT/TCP/UDP/RTMPS /VISCA OVER IP ;
Audio compression: AAC, G.711;
Supports main and sub-stream output.
Built-in WEB UI;
Support NDI HX3, Dante AV-H.